

LUMATEK
PROFESSIONAL LIGHTING

ATS200W LED



The Lumatek ATS series is a range of full spectrum LED grow lights featuring top bin LUMLED LEDs and dimmable Lumatek drivers. This light-weight fixture is ideal as sole-source or supplemental grow lighting for propagation, vegetative and flowering growth periods of indoor-grown crops.

2.3 $\mu\text{mol}/\text{J}$

460 $\mu\text{mol}/\text{s}$ total output

Full-Spectrum





ATS200W LED

- EFFICACY** 2.3 $\mu\text{mol}/\text{J}$
- PPF** 460 $\mu\text{mol}/\text{s}$
- INPUT VOLTAGE** 200-240V, 50-60Hz
- INPUT CURRENT** 0.87A (100%)
- POWER CONSUMPTION** 200W
- FOOTPRINT** 0.8x0.8m
- APPLICATION** Controlled-Climate Rooms & Grow Tents
- WATERPROOF & DUSTPROOF** IP20
- LIFETIME (LED BARS)** 60 000 hrs
- LIGHT DISTRIBUTION** 110°
- LIGHT SOURCE** LUMLED Diodes
- DIODES RATIO** White 87,5% ; Red 8.6% ; Far Red 3.9%
- DIODES EFFICIENCY** LUMLED Dark Red 660NM 3.1 $\mu\text{mol}/\text{J}$;
LUMLED White 2.9 $\mu\text{mol}/\text{J}$
- DIMMABLE** 20%-40%-60%-80%-100%
- WEIGHT** 3.9 Kg
- DIMENSIONS** 508 x 508 x 86 mm
- SPECTRUM** Full Spectrum +
- THERMAL MANAGEMENT** Passive
- BTU** 757 BTUs/h
- POWER FACTOR** >0.95
- WARRANTY** 3 Years
- CERTIFICATIONS** CE, IP65, UL1598, UL8800, EN61347-2-12,
EN 61347-1, IEC 60598-1-2014,
GBT 33721-2017 & GB7000.1-2015

ITEMS INCLUDED IN THE BOX:

- 1 x ATS200W LED Fixture (LED Driver and Dimmer Included)
- 1 x Power Cable
- 2 x Metal Cable Hangers
- 1 x Manual

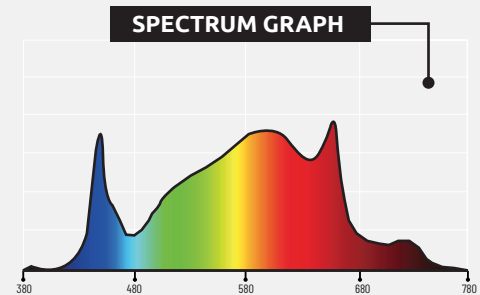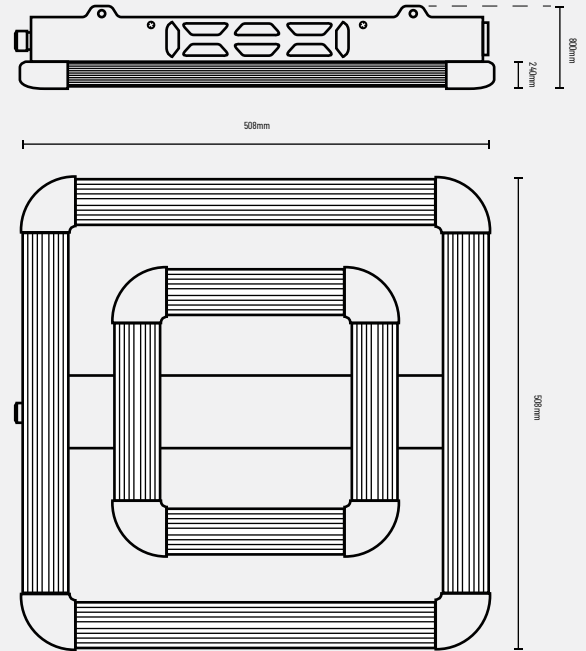

PPFD: PHOTOSYNTHETIC PHOTON FLUX DENSITY ($\mu\text{mol}/\text{m}^2/\text{s}$)

RECOMMENDED PPFD ($\mu\text{mol}/\text{m}^2/\text{s}$)

PLANT	SEED	CLONES	VEGETATIVE	FLOWERING
CANNABIS	100-300	75-150	300-550	650+
TOMATOES	150-350	75-150	350-550	650+
CUCUMBERS	100-300	--	300-550	650+
PEPPERS	150-350	--	300-550	650+

FACTORS THAT CAN INFLUENCE PPFD TESTS

- TEST EQUIPMENT.
- LAMP BEADS DEVIATION
- AMBIENT TEMPERATURE DEVIATION
- PC COVER TRANSMITTANCE DEVIATION
- POWER SOURCE EFFICIENCY DEVIATION
- REFLECTION CONSIDERED OR NOT

LUMATEK ATIS200W PPFD MAPS (1M x 1M VARIANT)

- TEST AREA** 1M x 1M
- TEST POINTS** 25
- TEST EQUIPMENT** INTEGRATING 2 METER SPHERE & EVERFINE PLA20
- AMBIENT TEMPERATURE** 25°
- HEIGHT FROM CANOPY** 15CM, 30CM
- REFLECTION** 0%
- FIXTURE POWER** 100%

LUMATEK ATS200W PPFD MAPS (1.5M x 1.5M VARIANT)

- TEST AREA** 1.5M x 1.5M
- TEST POINTS** 25
- TEST EQUIPMENT** INTEGRATING 2 METER SPHERE & EVERFINE PLA20
- AMBIENT TEMPERATURE** 25°
- HEIGHT FROM CANOPY** 40CM, 50CM, 60CM, 70CM
- REFLECTION** 0%
- FIXTURE POWER** 100%


LUMATEK ATS 00W PPF D MAPS (1M x 1M VARIANT)

HEIGHT TO TEST POINT **15cm**

CANOPY AVERAGE PPF D

0,8m x 0,8m: 835.07 $\mu\text{mol}/\text{m}^2/\text{s}$

1m x 1m: 446.5 $\mu\text{mol}/\text{m}^2/\text{s}$

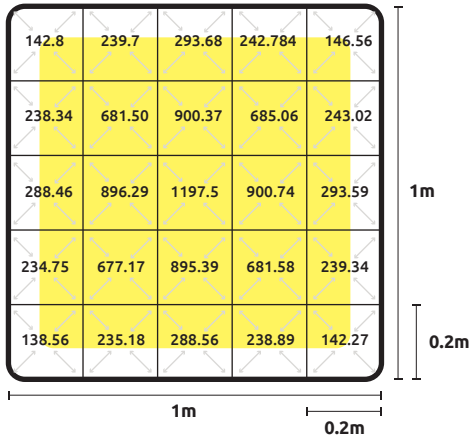


HEIGHT TO TEST POINT **30cm**

CANOPY AVERAGE PPF D

0,8m x 0,8m: 586.55 $\mu\text{mol}/\text{m}^2/\text{s}$

1m x 1m: 403.87 $\mu\text{mol}/\text{m}^2/\text{s}$

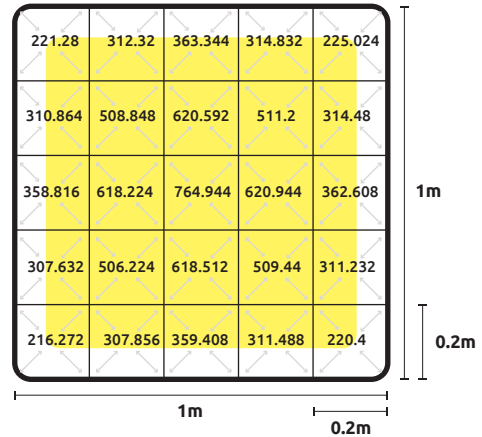


LUMATEK ATS200W PPF D MAPS (1.5M x 1.5M VARIANT)

HEIGHT TO TEST POINT **40cm**

CANOPY AVERAGE PPF D 161.57636 $\mu\text{mol}/\text{s}/\text{m}^2$


(@25 POINTS AVERAGE VALUE)

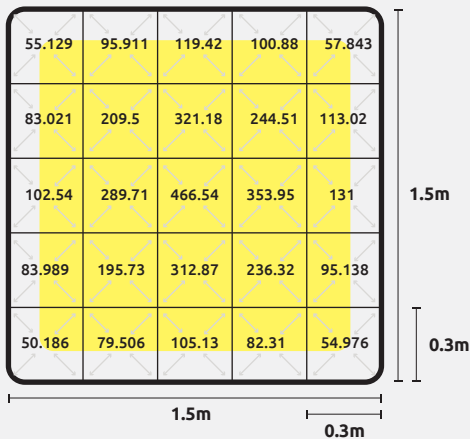

HEIGHT TO TEST POINT **50cm**

CANOPY AVERAGE PPF D 156.4477 $\mu\text{mol}/\text{s}/\text{m}^2$


(@25 POINTS AVERAGE VALUE)

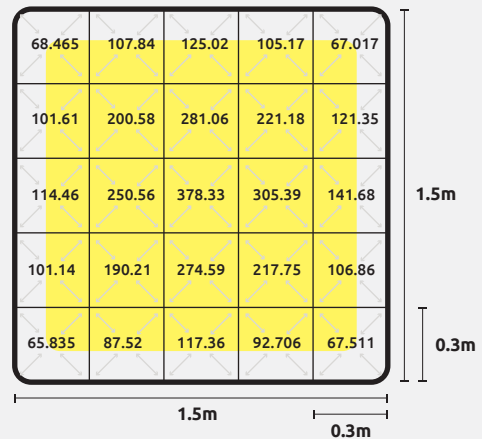

HEIGHT TO TEST POINT **60cm**

CANOPY AVERAGE PPF D 148.88 $\mu\text{mol}/\text{s}/\text{m}^2$

(@25 POINTS AVERAGE VALUE)

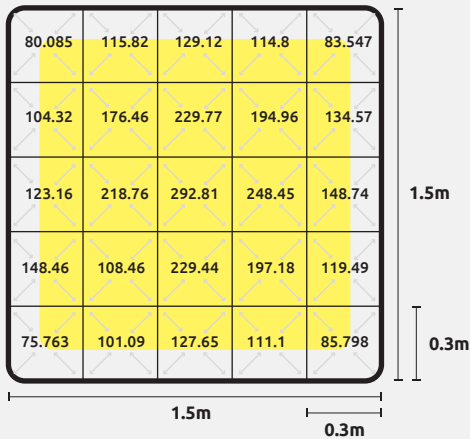

HEIGHT TO TEST POINT **70cm**

CANOPY AVERAGE PPF D 156.4477 $\mu\text{mol}/\text{s}/\text{m}^2$

(@25 POINTS AVERAGE VALUE)

